


**SERIES MCX-75 Ohm
RF COAXIAL CONNECTORS**

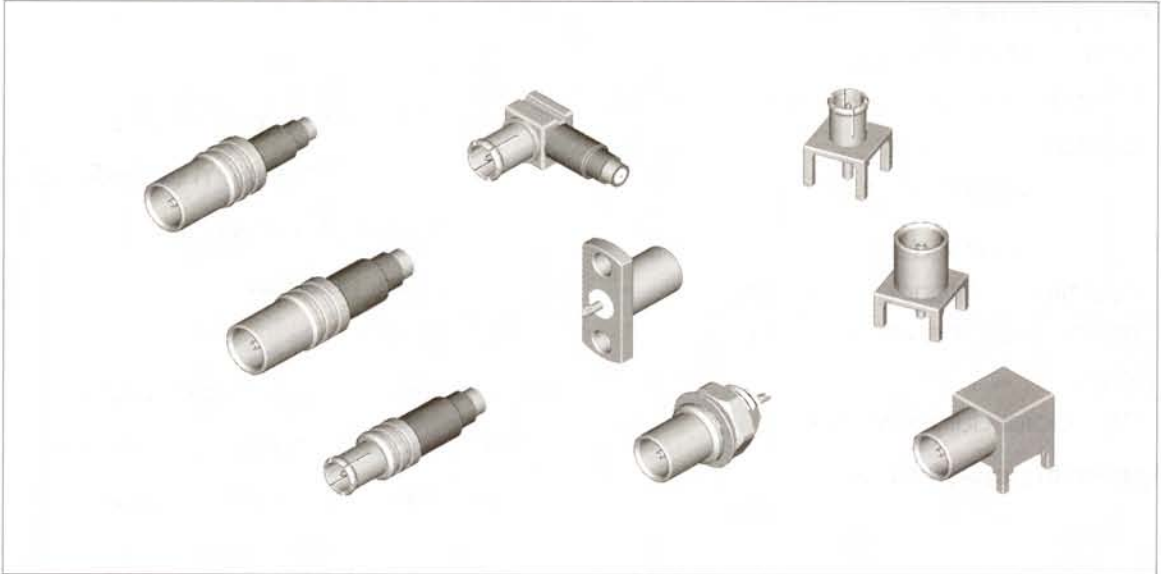


Key performance

- Characteristic impedance: 75 Ω
- Frequency range: 0~2GHz
- Contact resistance:
 - Center conductor: ≤4.0m Ω
 - out conductor : ≤2.0m Ω
- Insulation resistance : ≥1000M Ω
- insulator voltage withstanding : 750 V
- VSWR : ≤1.30
- Connector durability : 500

Applicable spec/std: IEC1169-36


Material

- Center contacts:
 - Male---brass, gold plated.
 - Female---beryllium copper, gold plated
- Bodies and other metal parts:
 - brass, gold plated
- Insulators: TFE
- Crimp ferrule: copper, nickel plated.
- Gasket and seal rings: silicone rubber
- Heat-shrink tubing: thermofit plastic.

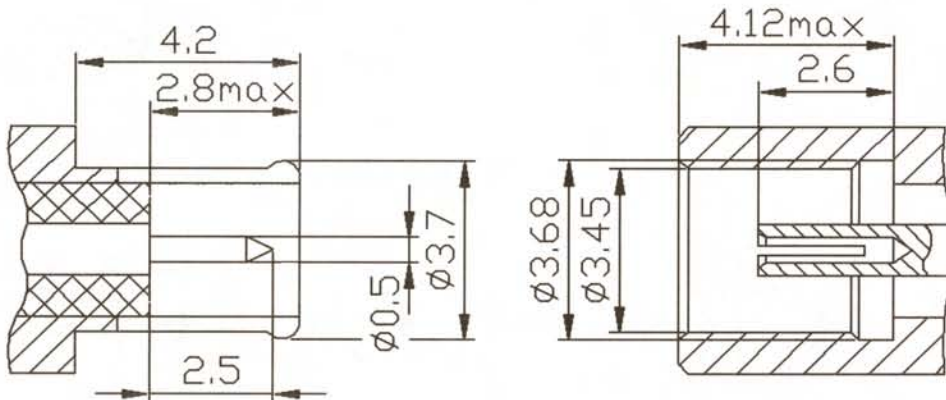



MCX-75J2

Cable Code: 2




MCX-75JHD

mounting hole





MCX-75J3

Cable Code: 3




MCX-75KHD

mounting hole





MCX-75JW2

Cable Code: 2




MCX-75KHD1

mounting hole





MCX-75JW3

Cable Code: 3




MCX-75KWHD

mounting hole





MCX-75K2

Cable Code: 2




MCX-75KF

mounting hole



MCX-75K3

Cable Code: 3



MCX-75KY

mounting hole

